

Planters

Implements

Disc Blades

Tillage
Tools



Disc Plough



**Quality and greater yields on ploughing jobs
and to build-up level curves for erosion control**



Disc Plough


The model **AF Disc Plough** is designed for extra strength and offers a wide range of adjustments that permit efficient operation under all types of field and soil conditions. It is well suited for sugar cane stubble and similar crops that leave a high concentration of trash.

- Heavy duty frame.
- Category I or II brackets for universal three point lift.
- Adjustments to control width of cut and depth of penetration.
- Disc blades and furrow wheel mounted to hubs with greasable, double row, tapered roller bearings.
- Adjustable furrow wheel and cross-shaft.
- Equipped with parking stand.



Optional Equipment

Adjustable depth control wheel (gauge wheel).

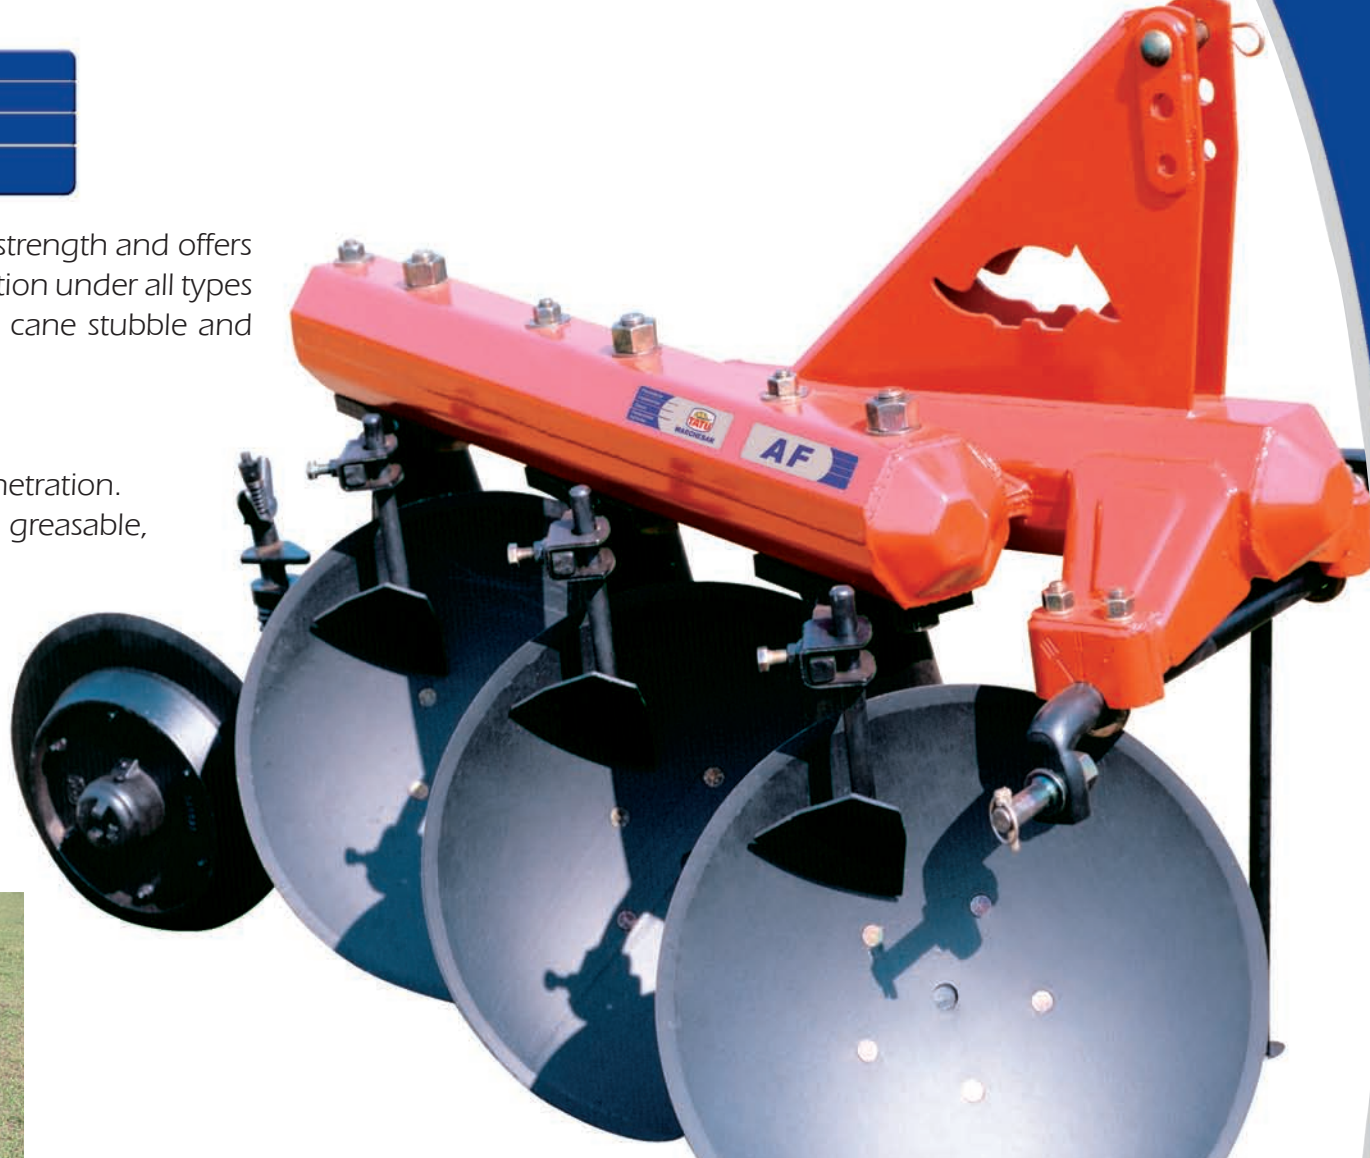

SPECIFICATIONS

Model	Number of Discs	Width of Cut		DISCS		Weight lb. (Kg)*	Tractor HP Required
		in.	(mm)	Dimensions	Spacing		
AF	2	22" - 26"	(550 - 650)	26"x4.75mm		690 (314)	45 - 50
	3	31" - 36"	(800 - 920)	ou	22"	896 (408)	60 - 70
	4	40" - 48"	(1,020 - 1,230)	28"x6.00mm	(570mm)	1,082 (492)	80 - 95
	5	50" - 61"	(1,280 - 1,550)			1,307 (594)	105 - 120

*Weight of the AF equipped with 26"x4.75mm Plain Discs - Depth of penetration: up to 9.7/8" (250mm).

Planters

Implements

Disc Blades

Tillage Tools



MARCHESAN

MARCHESAN - TATU PRODUCTS

Av. Marchesan, 1979 - P.O. Box 131 - ZIP 15994-900 - Matão-SP-Brazil

Fone: (55) 16 3382-8282 - Fax: (55) 16 3382-1003 / 3382-1009

www.marchesan.com.br

e.mail: tatu@marchesan.com.br

MARCHESAN S.A. reserves the right to improve or modify its products, changing the specifications, without previous notice. The photos are merely illustrative. - 04/2008 - Edition 03